

Fiber Termination Unit (LIU)


OVERVIEW

LIU manufactured out of steel sheet punched, formed, welded and Powder coated with highest quality standards under stringent ISO 9001-2008 Manufacturing & Quality management system to ensure highest quality product.

Standard model will be 1U / 19" box with options of front coupler plates.



NETRACK™

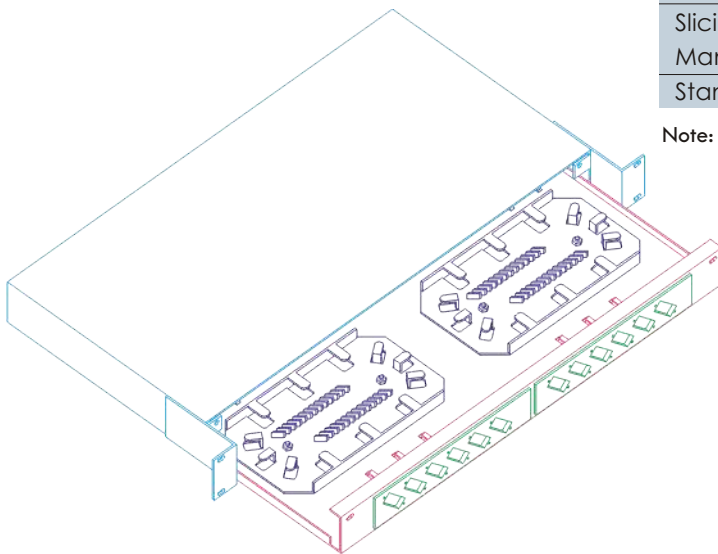

| Technical Data: | |
|----------------------------|---------------------------|
| Basic Chasis | Steel |
| Construction | Sliding Type |
| Mounting | 19" / 21" Rack Mount |
| Standard Finish | Powder coated |
| Slicing & Cable Management | PVC |
| Standard Colour | Grey & Off White or Black |

Note: Other Colour powder coating on request.

| Model Matrix & Dimensions | | | |
|---------------------------|----|-------|-----------|
| Coupler Type | | Model | |
| SC Simplex | 6 | Port | (3 + 3) |
| | 12 | Port | (6 + 6) |
| | 24 | Port | (12 + 12) |
| SC Duplex | 12 | Port | (3 + 3) |
| | 24 | Port | (6 + 6) |
| ST Simplex | 6 | Port | (3 + 3) |
| | 12 | Port | (6 + 6) |
| | 24 | Port | (12 + 12) |