


## OVERVIEW

NRS 1 Series, **General Electronics Racks for servers, Networking, Av, Telecom & lab application.** Racks manufactured out of steel sheet punched, formed, welded and powder coated with highest quality standard under stringent ISO 9001-2008 Manufacturing & Quality management system to ensure highest quality product.



Standard for Racks configuration will be welded frame with vented top cover with fan mounting provision, Associated Front Glass or perforated Metal Door with lock & Key and Back vented / Perforated metal door with lock & key and partially vented side panels, free standing on floor with 4 No. casters wheels with 2 no with brakes & 2 No. without brakes, optional Levelers. Available from 6 RU Variants with 650, 800 & 1000 Deep configurations and 600 & 800 width configurations.

Small Size racks 6RU to 15 RU can be table mounted with leveler legs/ bush.

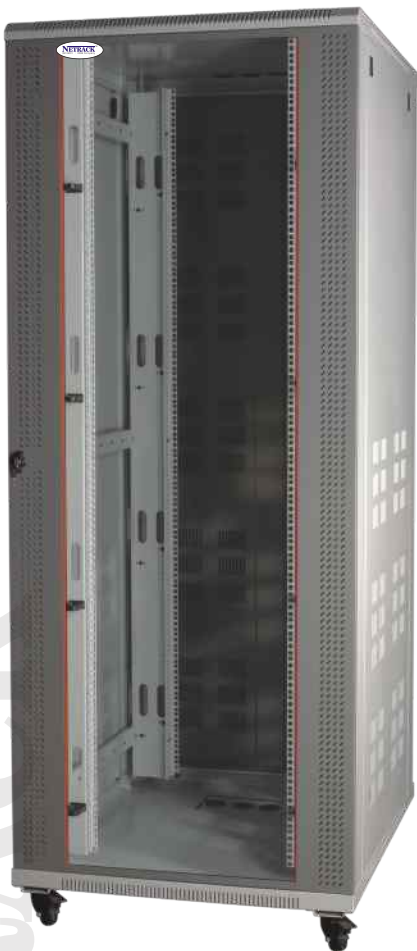

## Features

- Conforms to DIN 41494 or Equivalent EIA /ISO/ EN/CEA Standard
- Adjustable mounting depth
- 4 No Adjustable. 19" verticals with Punched 10mm Squarer Hole and Universal 12.7 mm-15.875 mm- 15.875 mm alternating hole pattern offers greater mounting flexibility, maximizes usable mounting space.
- Numbered U positions
- Universal 25mm Pitch Holes For ETSI Standard Racks
- State-of-the art manufacturing methods provide the best product quality and fastest delivery in the industry
- 100% assured compatibility with all equipments conforming to DIN 41494 (General industrial standard for equipments)
- Powder coated finish with Seven tank pretreatment process meeting ASTM standard
- Grounding & Bonding Options
- Fan module Mount Provision on top Cover

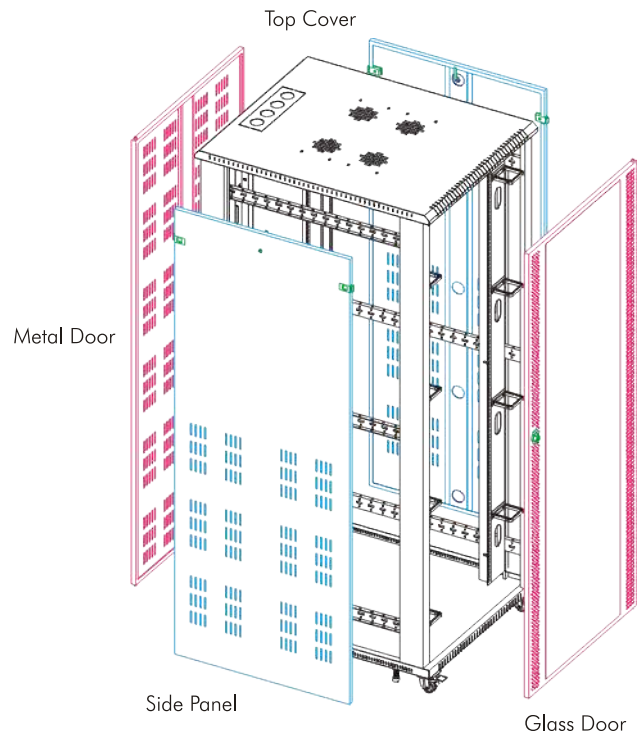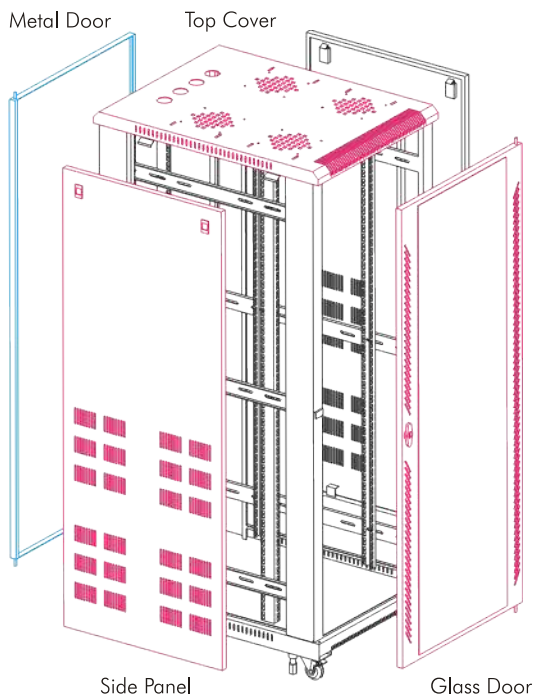

Technical Data:	
Basic Frame	Steel folded
Construction	Welded
Top & Bottom Cover	Integrated to Frame with Cable entry exit cut outs
Front Door	Lockable Toughened Glass Door Or Lockable Perforated steel Door
Rear Door	Lockable Steel Door - Plain/ vented/perforated
19" Mounting Angle	Formed Steel
Std. Equipment Mounting	DIN Std. 10 mm Sq. Slots
Standard Finish	Powder coated
Standard Colour	Grey & Off white OR Black
	Caster wheels (2 with Brake & 2 without Brake) OR Levelers Or Plinth
Rack Standard	Conforms to DIN 41494 or equivalent standard
Static Load	350 Kg with casters 750 Kg with Levelers/Plinth

## Accessories :

- Fixed Shelf
- Cantilever Shelf
- Sliding Shelf
- Key Board Shelf
- Power Distribution Units
- Cable Organisers.
- Fans and Fan Modules.
- Rack Ground Kit
- Plinth
- Casters
- Levellers
- Cable Basket

## Note :

Other Colour powder coating,  
ETSI Std. Racks and Other models  
can be manufactured on request.

Model Matrix & Dimensions						
NRS 1 Series	H	h	W	w	D	d
17U600X650	935	17U	600	19"	650	550
17U600X800	935	17U	600	19"	800	700
17U600X1000	935	17U	600	19"	1000	900
22U600X650	1160	22U	600	19"	650	550
22U600X800	1160	22U	600	19"	800	700
22U600X1000	1160	22U	600	19"	1000	900
27U600X650	1380	27U	600	19"	650	550
27U600X800	1380	27U	600	19"	800	700
27U600X1000	1400	27U	600	19"	1000	900
32U600X650	1625	32U	600	19"	650	550
32U600X800	1625	32U	600	19"	800	700
32U600X1000	1625	32U	600	19"	1000	900
32U800X800	1625	32U	800	19"/27"	800	700
32U800X1000	1625	32U	800	19"/27"	1000	900
42U600X650	2068	42U	600	19"	650	550
42U/600X800	2068	42U	600	19"	800	700
42U/600/1000	2068	42U	600	19"	1000	900
42U/800X800	2068	42U	800	19"/27"	800	700
42U/800X1000	2068	42U	800	19"/27"	1000	900

1U = 44.45 mm

Note : Other models can be manufactured on request.

## Abbreviations

- H - Overall height
- h - Usable height
- W - Overall width
- w - Usable width
- D - Overall depth
- d - Usable depth

NETRACK™

## OVERVIEW

NRS 1 Series (table mount) **General Electronics Racks for Servers, Networking, AV, Telecom & lab application.** Racks manufactured out of steel sheet punched, formed, welded and Powder coated with highest quality standards under stringent ISO 9001-2008 Manufacturing & Quality management system to ensure highest quality product.

Standard for Racks configuration will be welded frame with vented top cover with fan mounting provision, Associated Front Glass or perforated Metal Door with lock & Key and Back Vented / perforated metal door with lock & key and partially vented side panels, mounted on table with 4 no bush/ leveler available from 6 RU to 15 RU Variants with 650, 800 & 1000 Deep configurations and 600 width configuration.



### Model Matrix & Dimensions

NRS 1 Series	H	h	W	w	D	d
6U600X650	357	6U	600	19"	650	550
6U600X800	357	6U	600	19"	800	700
6U600X1000	357	6U	600	19"	1000	900
9U600X650	490	9U	600	19"	650	550
9U600X800	490	9U	600	19"	800	700
9U600X1000	490	9U	600	19"	1000	900
12U600X650	623	12U	600	19"	650	550
12U600X800	623	12U	600	19"	800	700
12U600X1000	623	12U	600	19"	1000	900
15UX600X650	757	15U	600	19"	650	550
15UX600X800	757	15U	600	19"	800	700
15U600X1000	757	15U	600	19"	1000	900

### Abbreviations

- H - Overall height
- h - Usable height
- W - Overall width
- w - Usable width
- D - Overall depth
- d - Usable depth

1U = 44.45 mm

Note : Other models can be manufactured on request.