

## Overview

NRS Series standard for Racks configuration will be welded frame with 4 No. Pillars made of formed steel profile welded to top and bottom ribbed / reinforced frame additionally supported depth wise by 6 No depth rail 4 folded profile. Free standing on floor with 4 No. casters wheels with 2 Nos. with brakes and 2 Nos. without brakes & with levelers OR plinth.

NRA Series standard for Racks configuration will be bolted frame with 4 No. Pillars made of aluminium extruded profile bolted to top and bottom ribbed / reinforced frame additionally supported depth wise by 6 no depth rail 4 folded profile. Free standing on floor with 4 No casters wheels with 2 Nos. with brakes and 2 Nos. without brakes & with levelers OR plinth.






Available in 42 RU Variants with 800,1000 & 1200 Depth configurations and 800 Width configurations.



# NRS/NRA - 4 Post 800 Wide Rack Configurator Drawing with Critical Parts

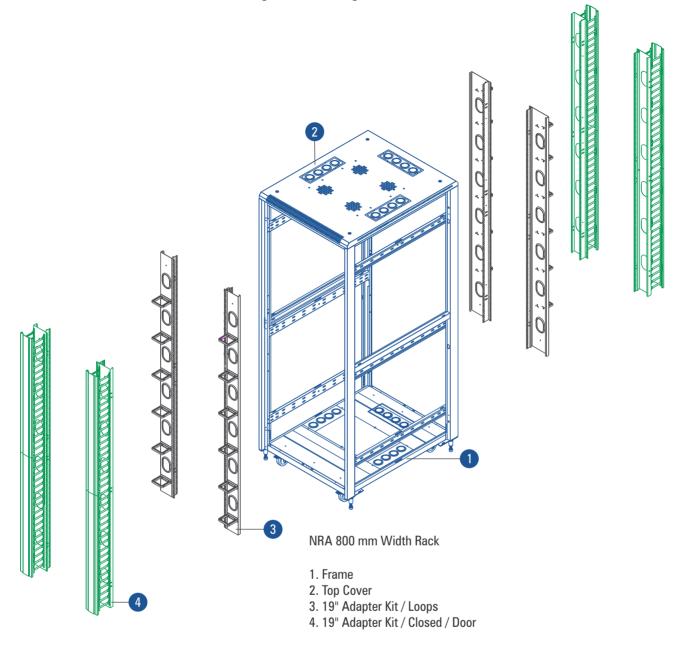

### **Features**

- O Conforms to DIN 41494 or Equivalent EIA /ISO / EN / CEA Standard
- Adjustable mounting depth
- 4 No Adjustable, 19" verticals with Punched 10 mm Square Hole and Universal 12.7mm-15.875mm alternating hole pattern offers greater mounting flexibility, maximizes usable mounting space.
- Numbered U positions
- State-of-the-art manufacturing methods provide the best product quality and fastest delivery in the industry
- 100% assured compatibility with all equipments conforming to DIN 41494 (General industrial standard for equipments)
- Powder coated finish with Seven tank pretreatment process meeting ASTM standard
- Grounding & Bonding Options
- Fan module Mount Provision on top Cover



## **Accessories:**

- Fixed Shelf
- Cantilever Shelf
- Sliding Shelf
- Key Board Shelf
- Power Distribution Units
- Cable Oragnisers
- Fans and Fan Modules
- Rack Ground Kit
- Plinth
- Casters
- Levellers
- Cable Basket

Technical Data:	
Basic Frame	NRA - Composite (Aluminium Section & Steel), NRS - Steel folded
Construction	NRA - CKD Type, NRS - Welded OR CKD design
Top & Bottom Cover	Bolted to Frame with Cable entry exit cut outs
19" Mounting Angle	Formed Steel
Std. Equipment Mounting	DIN Std. 10mm Sq. Slots.
Standard Finish	Powder coated
Standard Colour	Grey & Off white OR Black
Standard Mounting	Caster wheels (2 with Brake & 2 without Brake) OR Levelers OR Plinth.
Rack Standard	Conforms to DIN 41494 or equivalent standard
Static Load	750Kg with casters, 1250Kg with Levelers / Plinth.

#### Note:

1. For model matrix refer NRS/NRA series page No 159, 160, 171, 172

