


Overview

Managing more servers at rack level with single monitor and key board OR LCD Console drawer is a challenge and as entry level we need some device to manage this cost effectively. NetRack understand the requirement introduce Analogue 8 and 16 port KVM which can be cascaded till 8 levels. Interestingly Analogue KVM are used in all SOHO, SMB and Enterprise segment.

NR-CV-S801

NR-CV-S1601

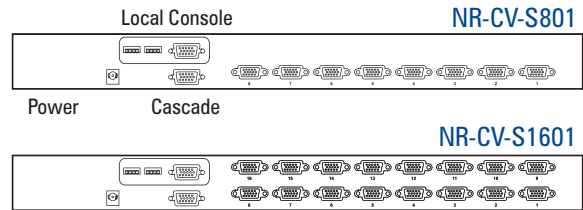

Combo DB-15 KVM Benefits

- Combo DB-15 KVM with either 8 or 16 ports in 1U
- Cascade switches up to 8 levels & Mix switches between Cat6 & Combo DB-15 KVM
- Mix PS/2, USB & SUN with Multi-Platform switch capability
- Support resolution up to 1920 x 1080
- SUN 1152 x 900 resolution compatible
- Hot pluggable, no software or drivers required
- Easy & quick installation

Switch Features & Options

- Multi lingual on screen display menu
- Advanced user profiles and configurable OSD hot key combinations
- DC power options : 12V / 24V / 48V / 110 ~ 125V

Ordering Information

Console	Local	Remote	IP	8-port	16-port
	1	0	0	NR-CV-S801	NR-CV-S1601

KVM Specification

<b>KVM Port</b>		<b>Power</b>	
Number of ports:	8 or 16	Input:	Auto sensing 100 to 240VAC, 50/60 Hz
Connector:	DB-15 combo connector	Option DC:	12V/24V/48V/110 ~ 125V DC input
Connectivity:	Combo 4-in-1 KVM cable, up to 6, 10 & 15 feet	Consumption:	Max. 24 Watt, Standby 5 Watt
<b>Local Console</b>		<b>Regulatory</b>	
Graphic Connector:	1 x DB-15 VGA	Safety:	cUL, FCC & CE certified
Resolution:	Up to 1920 x 1080 / 1920 x 1200	Environment:	RoHS2 & REACH compliant
Input Device:	2 x USB type A for keyboard & mouse	<b>Environmental</b>	
<b>Management</b>		Operating:	0 to 55°C
Multilingual OSD:	English, France, German, Spanish, Italian, Russian, Simplified Chinese, Japanese	Storage:	-5 to 60°C
Hotkey Combination:	Scroll-lock, Cap-lock, Num-lock, Alt, Ctrl & Win	Relative Humidity:	90%, non-condensing
Security:	Password enable & disable, up to 8 users profile for access	Shock:	50G peak acceleration (11ms, half-sine wave)
PC Selection:	Front button, OSD menu & hotkey	Vibration:	58~100Hz / 0.98G (11ms / cycle)
<b>Expansion</b>		<b>Product Information</b>	
Up to 128 servers by 8-level cascade		Dimension (W x D x H):	443 x 171 x 44 mm / 17.4 x 6.7 x 1.73 inch
<b>Compatibility</b>		Net Weight:	2.4 kg / 5.3 lb ( CV-S801 ) 2.6 kg / 5.7 lb ( CV-S1601 )
Multi-Platform:	Mix PCs, SUN and Mac G3 G4 Mac / iMac	<b>Packing Information</b>	
Support:	Windows 7 / Vista / 2003 XP, Linux, Unix	Dimension (W x D x H):	500 x 400 x 90 mm / 19.7 x 15.7 x 3.5 inch
		Gross Weight:	3.9 kg / 8.6 lb ( CV-S801 ) 4.2 kg / 9.2 lb ( CV-S1601 )

